


**MOMENTUM® Model  
Electronic New Work Flush Valve**

**VLV-FVL-3711 Series**

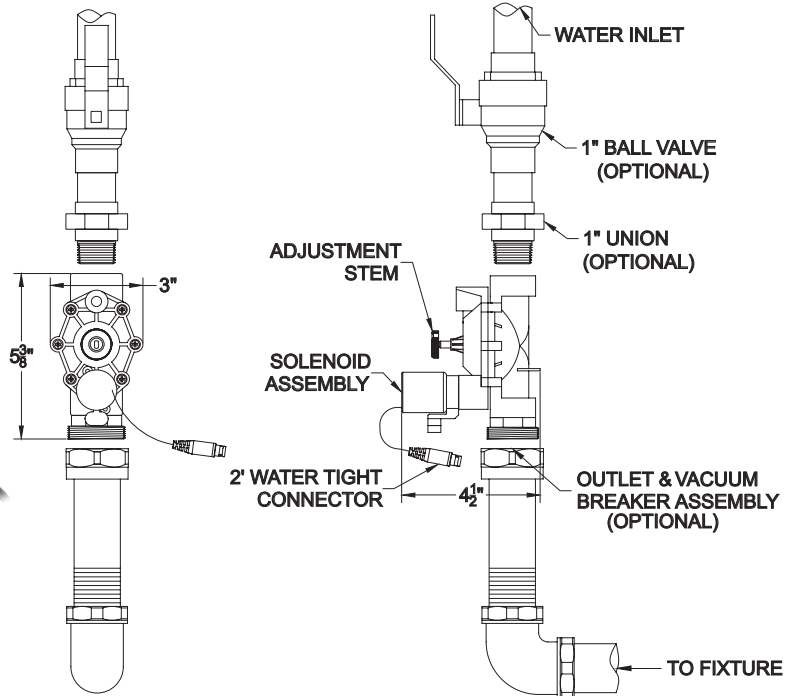

► **Description**

Concealed Water Closet and Urinal Flush Valve used in new installation application to reduce consumption and abuse.

► **High Velocity Flow** (choose one)

- 1.6 gpf on 3.5 gallon WC fixture - Low Consumption (LC)
- .9 gpf on 1.6 gallon WC fixture - Ultra High Efficient (UHE)
- .5 gpf on 1.0 gallon Urinal fixture - Low Consumption (LC)
- .125 gpf (1 pint) on Urinal fixture - Ultra High Efficient (UHE)

► **Inlet & Outlet Assemblies** (choose one or more)

- 1-1/2" Brass vacuum breaker, elbow, and outlet tubing
- 3/4" Brass vacuum breaker, elbow, and outlet tubing
- 1" full port ball valve - SWT x SWT
- 1" Union - SWT x SWT
- None

► **Solenoid Power** (choose one)

- 24 Volts AC
- 9 Volts DC (Battery Operated)

► **Accessories**

For additional accessories, see the Accessories Section of the I-CON catalog or contact our Customer Service Team for details.



**Specifications**

- Third Party Tested and approved for flushing 1.6 gallons on a 3.5 gallon WC fixture and .9 gallons on a 1.6 gallon WC fixture
- Additional savings flushing .5 gallons on 1.0 gallon urinal and ability to flush 1 pint on urinal
- No metering diaphragms to fail and clog
- Engineered non-metallic valve body made from DuPont Zytel for advanced corrosion resistance
- Ability to flush using manual by-pass handle
- Straight through flow path to maximum flush velocity and provide superior force of flush
- All solenoids are interchangeable with other I-CON valves reducing spare parts
- Positive valve shut-off after pressure loss eliminating continual flush of typical flushometers
- Flush activation adjustment to overcome calcium build-up blocking flush jets

This space is for Architect/Engineer approval

The information contained in this document is subject to change without notice.